

# Laser Measuring Device LE 200 - PN

TR-VLE-TI-GB-0138

06/12 Revision 01

010203-02000302-XXXX



- + PROFINET IO interface
- + Robust
- + Measurement of linear movement
- + Non contact distance measurement
- + Measuring distance up to 125m, 170m, 195m other distances on request
- + Parametrizable
- + Further interfaces available
- + Customized adaptations upon request

## Characteristics

Supply voltage.....	Standard: 18...27 V DC $\pm$ 5 %, with heating: 24 V DC $\pm$ 5 %
Current consumption, without load.....	Standard: < 450 mA, with heating: < 2.5 A
Measurement principle.....	Phase shift measurement
Measuring length, against reflector foil .....	0.2...125 m standard, 170m, 195m (special devices)
Resolution selectable <sup>1)</sup> .....	physical resolution 0.1 mm
Linearization	
- up to 12 m, standard.....	absolute linearity error $\pm$ 3 mm
- complete measuring length.....	absolute linearity error $\pm$ 5 mm
Reproducibility .....	$\pm$ 2 mm
Laser diode, red light.....	Laser Protection Class 2 according to DIN EN 60 825-1: 2003-10
- Wave length $\lambda$ .....	670 nm
- Laser power .....	$P_{max} \leq 1$ mW
- Lifetime, 25 °C .....	50 000 h
Measurand output / refresh rate .....	1000 values / s
Integration time .....	1 ms
Programmable via RS485 .....	WINDOWS® compatible (TRWinProg) / PROFINET IO
PROFINET IO .....	IEC 61158, IEC 61784-1
- PROFINET specification.....	V2.2
- Conformance class .....	Conformance Class B
- Physical Layer.....	PROFINET 100Base-TX, Fast Ethernet, ISO/IEC 8802-3
- Output code .....	Binary
- Cycle time .....	$\geq 1$ ms (IRT / RT)
- Transmission rate.....	10 Mbit/s, 100 Mbit/s
- Transmission .....	CAT-5 cable, shielded (STP), ISO/IEC 11801
- Addressing <sup>1)</sup> .....	Per Name (name allocation about engineering tool). Assignment Name --> MAC during system boot
- Real-Time-Classes .....	RT Class 1, 2 Frames (RT), RT Class 3 Frames (IRT)
- Parameter <sup>1)</sup> .....	Count direction, Resolution, Preset value, speed, among others
Switching input / Switching output <sup>1)</sup>	
- Levels switching input.....	1-level > +8 V, 0-level < +2 V, up to $\pm 35$ V, 5 kOhm
- Levels switching output .....	1-level > US-2 V, 0-level < 1 V, up to 100 mA

<sup>1)</sup> programmable parameter


## Environmental conditions

Vibration, DIN EN 60068-2-6: 1996 .....	$\leq 50 \text{ m/s}^2$ , sine 50-2000 Hz
Shock, DIN EN 60068-2-27: 1995.....	$\leq 300 \text{ m/s}^2$ , half-sine 11ms
EMC	
- Immunity to disturbance, DIN EN 61000-6-2: 2006	
- Transient emissions, DIN EN 61000-6-3: 2007	
Working temperature	
- Standard .....	0...50 °C
- With heating .....	-30 °C...+50 °C
Storage temperature .....	-20 °C...+75 °C, dry
Thermal drift, related to the max. measuring length.....	1 ppm / °C at 125 m, 170 m or 195 m
Relative humidity, DIN EN 60068-3-4: 2002 .....	98 %, non condensing
Protection class, DIN EN 60529: 1991 <sup>2)</sup> .....	IP 65

<sup>2)</sup> valid with screwed on mating connector and / or screwed together cable gland

## Dimension drawing

(For project planning please request customized dimensional drawing!)

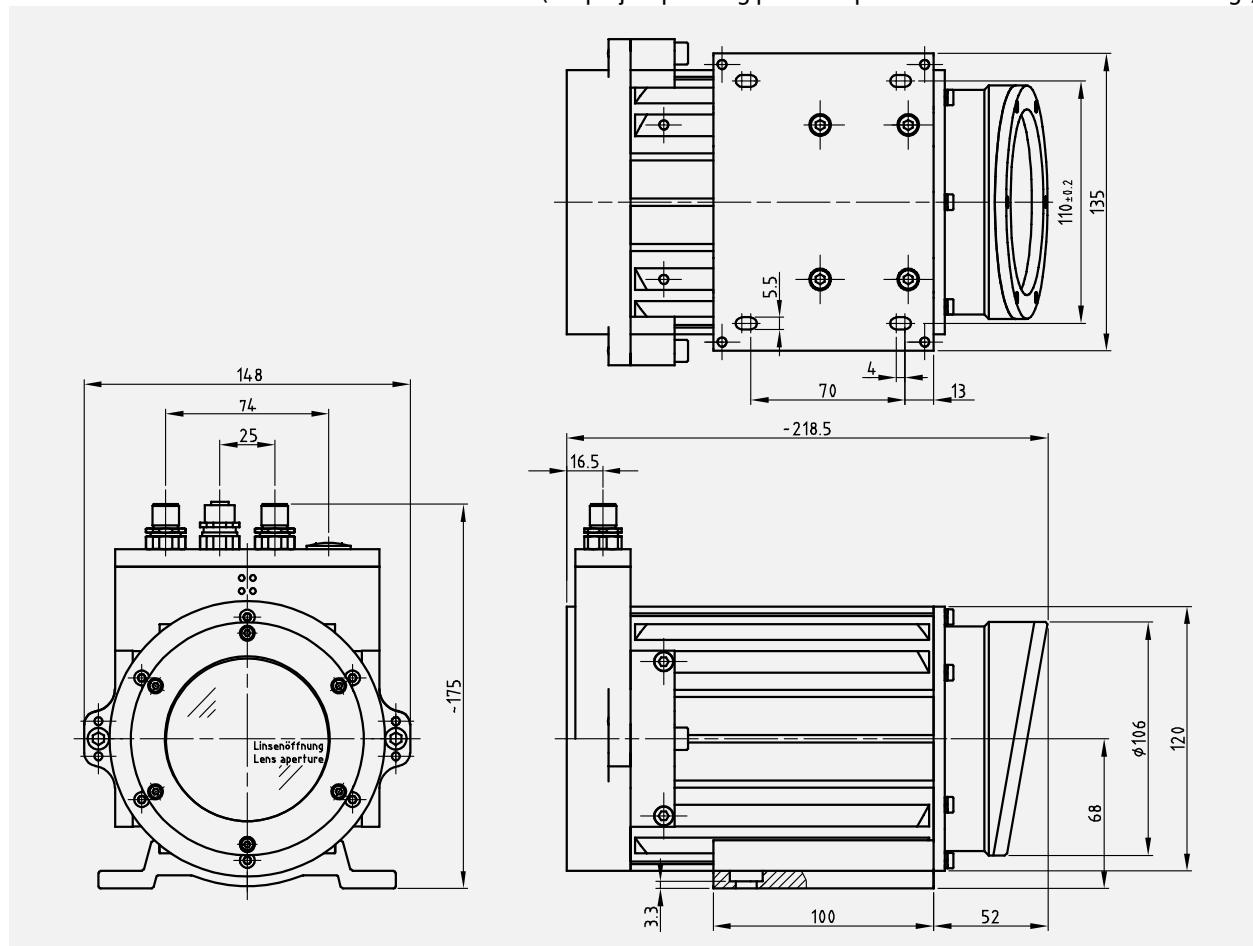

Subject to change