

Absolute-Encoder CMV58 - CO


Ref.: K-CMV58-CO-1

18.11.2013

010102005801020201

Advantages

- _ Economical alternative
- _ Further interfaces available
- _ Rugged standard solution
- _ Short lead times
- _ Small construction

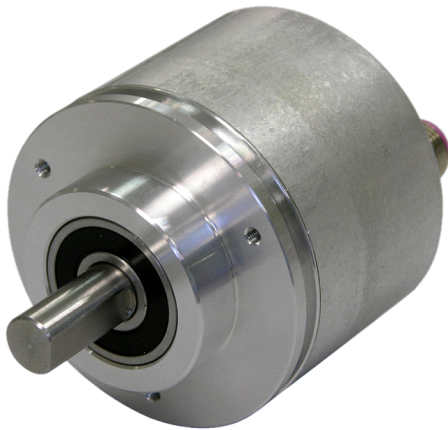

General Data

Supply	
- Supply voltage	11...27 VDC
Current consumption no load	<= 150 mA
Device design	
- Type	Single-/Multi-Turn
Total resolution	<= 23 Bit
Number of steps per revolution	<= 2048
Number of revolutions	<= 4096
Accuracy	$\pm 1,0^\circ$
CANopen - Interface	
- CANopen	EN 50325-4
- Bus connection	ISO 11898-1, ISO 11898-2
- CAN Specification 2.0 A	11-Bit Identifier
- Device-Profile for Encoder	CiA DS406
- Layer Setting Services, LSS	CiA DS305
Transmission rate	
- Specific value	20, 125, 500, 1000 kbit/s
- Adjustability	by means of DIP-switches
Parameter/Function, changeable	Resolution
	Node-ID
	Preset parameter
	Transmission rate

Subject to change.

TR-Electronic GmbH
 Eglshalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CMV58 - CO

Ref.: K-CMV58-CO-1

18.11.2013

010102005801020201

General Data continuation

	Counting direction
Type of parametrization	programmable
Prgramming - Tool	Fieldbus-Device
Maximum Speed, mechanically	≤ 12000 1/min
Shaft load, axial/radial	≤ 10 N, ≤ 20 N
Bearing life time	$\geq 3.9E+10$ revolutions
Bearing life time - Parameter - Speed	6000 1/min
- Operating temperature	60 °C
- Shaft load, axial/radial	≤ 5 N, ≤ 10 N
Point of origin, shaft load	at the shaft end
Angular acceleration	$\leq 10E+4$ rad/s ²
Moment of inertia, typically	1.3E-6 kg m ²
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.3 kg

Environmental conditions

Vibration	
- Specific value	≤ 100 m/s ²
- Sine	50...2000 Hz
Shock	
- Specific value	≤ 1000 m/s ²
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+60 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65

Subject to change.


Absolute-Encoder CMV58 - CO

Ref.: K-CMV58-CO-1

18.11.2013

010102005801020201

Dimensional drawing

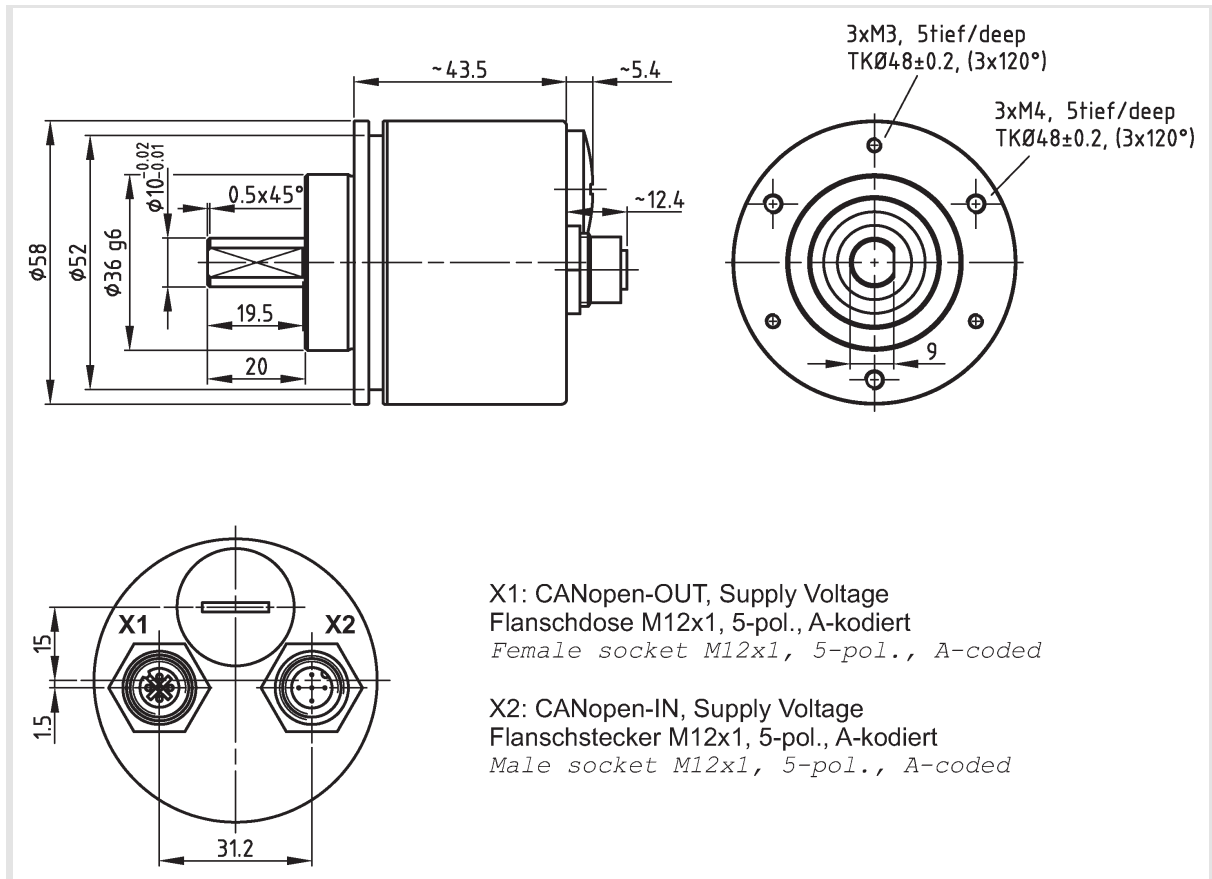

Suggested products

CMV58M*2048/4096 V000 CAN/OPEN
 36ZB/10FL
 2x 5pol M12 – Ub über Bus

CMV58M-00017

CMV58S*1024/1 CO 50ZB6GL
 2x 5 pol M12

CMV58S-00005

Subject to change.